

bizhub 950i IS WORKING FASTER

RETHINK PRODUCTIVITY



bizhub 950i

Black & White A3 multifunctional

CLOUD ENRBLED



CUSTOMER BENEFITS



Intuitive operability
Operate the bizhub like a
smartphone or tablet with fully
customized user interface



Security
Secure network integration,
data encryption and advanced
user authentication



Application ecosystem Enhanced efficiency thanks to Konica Minolta's extensive applications portfolio



ProductivityReliability, high-speed scanning and printing, combined with powerful finishing functions




Services
Efficient printer fleet
management, including
automatic consumables
delivery, proactive
maintenance and
remote setup




Sustainability Numerous eco features reduce energy consumption and costs


OPTIONS






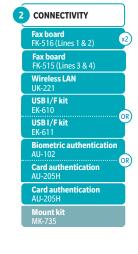





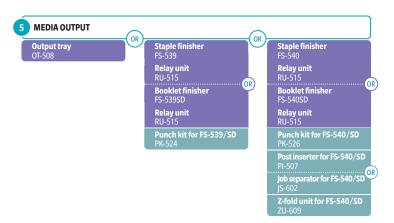



FINISHING FUNCTIONALITIES





























Corner stapling

Two-point stapling Two-hole punching

Three-hole punching

Duplex

Combined mixplex/ mixmedia Half-fold

insertion, report Tri-fold

Booklet

Offset sorting Z-fold

ld Banı print

Banner Corner printing Stapling

DESCRIPTION

| FNHA | NCFI |) FFAT | HRES |
|------|------|--------|------|

| LK-106 Barcode fonts | Supports native barcode printing |
|----------------------------------|---|
| LK-107 Unicode fonts | Supports native Unicode printing |
| LK-108 OCR A and B fonts | Supports native OCR A and B font printing |
| LK-110v2 Document converter pack | Generates various file formats incl. DOCX, XLSX and PDF/A |
| LK-111 ThinPrint® client | Print data compression for reduced network impact |
| LK-116 Antivirus | Bitdefender® antivirus provides real time scanning of all |
| | incoming and outgoing data |
| LK-117 FOIP activation | Fax over IP networks (T.38), requires fax kit |

CONNECTIVITY

| FK-516 Fax board | Super G3 fax, digital fax functionality |
|-------------------------------------|---|
| UK-221 Wireless LAN | Wireless LAN and wireless LAN Access Point Mode |
| EK-610 USB I/F kit | USB keyboard connection |
| EK-611 USB I/F kit | USB keyboard connection; Bluetooth |
| AU-102 Biometric authentication | Finger vein scanner |
| AU-204H Magnetic Stripe Card Reader | ID Card Authentication |
| AU-205H ID card reader | Various ID card technologies |
| MK-735 Mount kit | Installation kit for ID card reader |

OTHERS

| WT-506 Working table | Authentication device placement |
|------------------------|------------------------------------|
| WT-519 Upright panel | Working table for upright panel |
| KP-102 10-Key pad | For use instead of touchscreen |
| SC-509 Security kit | Copy guard function |
| EM-908 SSD | 1 TB SSD to increase storage space |
| KH-102 Keyboard holder | To place USB keyboard |
| External Keyboard | |

MEDIA INPUT

| LU-303 Large capacity tray | 3,000 sheets, 8.5" x 11", 52–256 g/m² |
|----------------------------|---|
| LU-205 Large capacity tray | 2,500 sheets, 8.5" x 11" - 12" x 18", 52-256 g/m ² |
| MK-730 Banner trav | Multinage hanner feeding |

MEDIA OUTPUT

| OT-508 Output tray | Output tray used instead of finisher |
|------------------------------------|--|
| FS-539 Staple finisher | 50 sheets stapling; 3,200 sheets max. output |
| FS-539SD Booklet finisher | 50 sheets stapling; 20 sheets booklet finisher; |
| | 2,200 sheets max. output |
| PK-524 Punch kit for FS-539/SD | 2/3 hole punching; autoswitching |
| FS-540 Staple finisher | 100 sheets stapling; 3,200 sheets max. output |
| FS-540SD Booklet finisher | 100 sheets stapling; 20 sheets booklet finisher; |
| | 2,700 sheets max. output |
| PK-526 Punch kit for FS-540/SD | 2/3 hole punching; autoswitching |
| RU-515 Relay unit | For FS-539/SD or FS-540/SD installation |
| PI-507 Post inserter for FS-540/SD | Cover insertion; post finishing |
| JS-602 Job separator for FS-540/SD | Separation of fax output; etc. |
| ZU-609 Z-fold unit for FS-540/SD | Z-fold for 11" x 17" prints |

TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS

| System speed Letter | Up to 95 ppm |
|--------------------------------|---|
| System speed 11" x 17" | Up to 48 ppm |
| Auto duplex speed Letter | Up to 95 ppm |
| 1st page out time Letter | 3.2 sec. |
| Warm-up time | Less than 55 sec. |
| Imaging technology | Laser |
| Toner technology | Simitri® V polymerized toner |
| Panel size/resolution | 10.1" / 1024 x 600 |
| System memory | 8 GB (standard/max) |
| Solid State Drive | 256 GB SSD (standard) / 1 TB SSD (optional) |
| Interface | 10/100/1,000-Base-T Ethernet; USB 2.0; |
| | Wi-Fi 802.11 b/g/n/ac (optional) |
| Network protocols | TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour |
| Automatic document feeder | Up to 300 originals; 5.5" x 8.5" - 11" x 17"; 35-210 g/m²; |
| | Dual scan ADF |
| ADF double feed detection | Standard |
| Printable paper size | 4.5" x 5.5" - 12" x 18"; custom paper sizes; |
| | banner paper max. 47.2" x 11.7" |
| Printable paper weight | 52-300 g/m ² |
| Paper input capacity | 3,650 sheets / 6,650 sheets (standard/max) |
| Paper tray input (standard) | 1x 500; 4.5" x 5.5"; custom sizes; 52-256 g/m ² |
| | 1x 500; 5.5" x 8.5"; 8.5" - 12" x 18"; custom sizes; 52-256 g/m² |
| | 1x 1,500; 5.5" x 8.5"; 8.5" - 11" x 17"; 52-256 g/m ² |
| | 1x 1,000; 5.5" x 8.5"; 8.5" - 11" x 17"; 52-256 g/m ² |
| Large capacity tray (optional) | 1x 3,000; 8.5" x 11"; 52-256 g/m² |
| | 1x 2,500; 8.5" x 11" - 12" x 18"; custom sizes; 52-256 g/m ² |
| Manual bypass | 150 sheets; 4.5" x 5.5" - 8.5" - 12" x 18"; custom sizes,banner; |
| | 60-300 g/m ² |
| | |

SYSTEM SPECIFICATIONS

| Finishing modes (optional) | Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold; |
|------------------------------|--|
| | Letter-fold; Booklet; Post insertion; Z-fold |
| Automatic duplexing | 4.5" x 5.5" - 12" x 18"; 52-256 g/m² |
| Output capacity | Up to 200 sheets / up to 3,300 sheets (standard/max) |
| Stapling | Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 g/m^2) |
| Stapling output capacity | Max. 200 sets |
| Letter fold | Max. 3 sheets |
| Letter fold capacity | Max. 50 sets; unlimited (without tray) |
| Booklet | Max. 20 sheets or 19 sheets + 1 cover sheet (up to 300g/m^2) |
| Booklet output capacity | Max. 35 booklets; unlimited (without tray) |
| Power consumption | 208 V / 60 Hz, 20A; less than 3.8 kW |
| System dimension (W x D x H) | 26.4" x 32.3" x 48.3" incl. ADF |
| System weight | Approx. 445 lbs (incl. ADF) |

bizhub 950i Datasheet

PRINTER SPECIFICATIONS

| I KINTEK SI ECII ICATIONS | |
|---------------------------|---|
| Print resolution | 600 x 600 dpi; 1200 x 1200 dpi |
| Page description language | PCL 6 (XL3.0); PCL 5e/c; PostScript 3 (CPSI 3016); XPS |
| Operating systems | Windows 7 (32/64); Windows 8.1 (32/64); Windows 10 (32/64); |
| | Windows Server 2008 (32/64); Windows Server 2008 R2; |
| | Windows Server 2012; Windows Server 2012 R2; |
| | Windows Server 2016; Windows Server 2019; |
| | Windows Server 2022 |
| | Macintosh OS X 10.13 or later; |
| | Mac OS 11/12 (AppleM1 chip-based PPD); Linux |
| Printer fonts | 80 PCL Latin; 137 PostScript 3 Emulation Latin |
| Mobile printing | AirPrint (iOS); Mopria (Android); |
| | Konica Minolta Print Service (Android); |
| | Konica Minolta Mobile Print (iOS/Android) |
| | optional: Wi-Fi Direct |
| | |

SCANNER SPECIFICATIONS

| SCANNER SI ECII ICANO | 113 |
|-----------------------|--|
| Scan speed | Up to 140/140 ipm in simplex (mono/color) |
| | Up to 280/280 ipm in duplex (mono/color) |
| Scan resolution | Up to 600 x 600 dpi |
| Scan modes | Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home); |
| | Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV; |
| | Scan-to-DPWS; Scan-to-URL; TWAIN scan |
| File formats | JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; Compact XPS; |
| | PPTX; PDF/A 1a and 1b |
| | optional: Searchable PDF; Searchable DOCX/PPTX/XLSX |
| Scan destinations | 2,000 destinations + 100 groups; LDAP support |
| | |

COPIER SPECIFICATIONS

| Copy resolution | 600 x 600 dpi |
|-----------------|-------------------------------------|
| Gradation | 256 gradations |
| Multicopy | 1-9,999 |
| Original format | Max. 11" x 17" |
| Magnification | 25-400% in 0.1% steps; Auto-zooming |

EAV CDECIECIATION

| TAX 51 ECII CIATION | |
|---------------------|------------------------------------|
| Fax standard | Super G3 (optional) |
| Fax transmission | Analog; i-Fax; Color i-Fax; IP-Fax |
| Fax resolution | Up to 600 x 600 dpi |
| Fax compression | MH; MR; MMR; JBIG |
| Fax modem | Up to 33.6 Kbps |
| Fax destinations | 2,000 single + 100 groups |
| | |

USER BOX SPECIFICATIONS

| Storable documents | Up to 3,000 documents or 10,000 pages |
|------------------------------|---|
| Type of user boxes | Public; Personal (with password or authentication); |
| | Group (with authentication) |
| Type of system boxes | Secure print; Encrypted PDF print; Fax receipt; Fax polling |
| SYSTEM FEATURES | |
| Security | ISO15408 Common Criteria; IP filtering and port blocking; |
| | SSL3 and TLS1.0/1.1/1.2/1.3 network communication; |
| | IPsec support; |
| | IEEE 802.1x support; User authentication; Authentication log; |
| | Secure print; Kerberos; |
| | Data encryption (AES 256); Confidential fax; |
| | Print user data encryption |
| Security function (optional) | Antivirus real-time scanning (Bitdefender®); |
| | Copy protection (Copy Guard, Password Copy) |
| Accounting | Up to 1,000 user accounts; Active Directory support (user name + |
| | password + e-mail + smb folder); User function access definition; |
| | Authentication by mobile device (Android) |
| | optional: Biometric authentication (finger vein scanner); |
| | ID card authentication (ID card reader); |
| | Authentication by mobile device (iOS) |
| Software | Net Care Device Manager; Data Administrator; Web Connection; |
| | Driver Packaging Utility; Log Management Utility |
| | |

- ¹ Warm-up time may vary depending on the operating environment and usage
- ² If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed
- All specifications refer to 8.5" x 11" paper of 80 g/m² weight.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of 8.5" x 11"). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- $\ \ All \ brand \ and \ product \ names \ may \ be \ registered \ trademarks \ or \ trademarks \ of \ their \ respective \ holders \ and \ are$ hereby acknowledged.

























For complete information on Konica Minolta products and solutions, please visit: CountOnKonicaMinolta.com

© 2023 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA, the KONICA MINOLTA logo and bizhub are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & specifications are subject to change without notice.



KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. 100 Williams Drive, Ramsey, New Jersey 07446

CountOnKonicaMinolta.com







